

SBS G Series Batteries

26AH - 225AH Gel (6V and 12V)




Advantages of Gel Batteries:

- Full recovery from deep discharge
- Ideal for repeat cycling
- Excellent for long discharge
- High temperature tolerance
- Positive plate protected design
- Thicker plates for reduced grid corrosion and increased cycle life
- High resistance to water loss and shorting
- Ultra Stable polymer separator with glass mat provides increased performance

Features

- Maintenance-free operation
- UL 94V-O case and cover are standard
- Low self-discharge (long shelf life)
- Spill-proof construction
- Tank formed plates
- Wide operating temperature
- Deep cycle ability
- 100% memory-free
- Non-restricted for air transportation
- UL recognized # MH19767
- Design life of 10 years in float service
- 1 year warranty

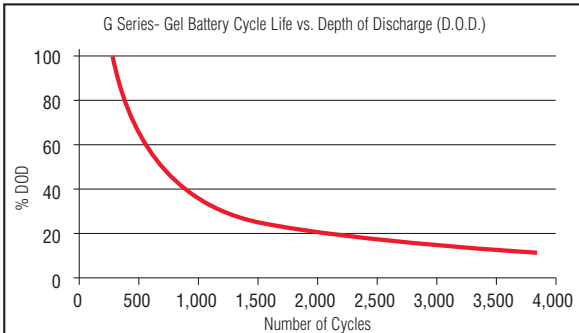

Construction	
Plates	Lead-tin-calcium alloy
Separator	Microporous glass fiber (Gelled)
Casing Material	ABS UL 94VO Flame Retardant
Float Voltage	2.25-2.30V/cell
Equalize Voltage	2.33 / 2.48 V/cell
Temperature Range	5°F to +122°F (-15°C to +50°C)
Service Life	8-10 years

Technical Data*												
Part No.	Volt (V)	AH/20HR	Length		Width		Height		Weight (Approx)		I.R. mOhms	Terminal Type
			in	mm	in	mm	in	mm	lbs	kgs		
G-6V180GC	6	180	10.24	322	6.97	177	9.06	230	74.96	34.08	2.00	F17
G-6V225	6	225	9.61	244	7.48	190	10.83	275	70.55	32.00	1.50	Special
G-12260	12	26	6.54	166	4.96	126	6.85	174	22.49	10.20	10.00	F13
G-12330	12	33	7.72	196	5.16	131	6.57	167	25.35	11.50	9.50	F15
G-12400	12	40	7.80	198	6.54	166	6.85	174	33.07	15.00	9.00	F13
G-12550	12	55	9.02	229	5.43	138	8.35	212	39.68	18.00	7.00	F15
G-12750	12	75	10.24	260	6.65	169	8.46	215	62.17	28.20	6.00	F15
G-12900	12	90	12.09	307	6.65	169	8.46	215	67.46	30.60	5.00	F15
G-12V100	12	100	12.91	328	6.77	172	8.66	220	75.40	34.20	4.00	F17
G-12V150	12	150	19.06	484	6.73	171	9.49	241	109.35	49.60	2.50	F17
G-12V210	12	210	20.55	522	9.53	242	8.74	222	168.65	76.50	2.00	F17