

**MODEL:** TE35-GEL

**VOLTAGE:** 6

**DIMENSIONS:** Inches (mm)

**BATTERY:** VRLA GEL

**COLOR:** Maroon (case) Grey (cover)

**MATERIAL:** Polypropylene

**WATERING SYSTEM:** N/A



BCI GROUP SIZE	TYPE	CAPACITY <sup>A</sup> Minutes	CAPACITY <sup>B</sup> Amp-Hours (AH)					ENERGY (kWh)	TERMINAL Type <sup>E</sup>	DIMENSIONS <sup>C</sup> Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	5-Hr Rate	10-Hr Rate	20-Hr Rate	100-Hr Rate	100-Hr Rate	Length		Width	Height <sup>D</sup>		
6 VOLT DEEP CYCLE GEL BATTERY													
DIM	TE35-GEL	479	180	193	210	220	1.32	8	9.64 (245)	7.51 (191)	10.65 (271)	69 (31)	

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 77°F (25°C) for Gel Lines and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

- C.** Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal.
- D.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- E.** Terminal images are representative only. Trojan's battery testing procedures adhere to both BCI and IEC test standards.

## CHARGING INSTRUCTIONS

<b>CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)</b>				
System Voltage	12V	24V	36V	48V
Absorption Charge	14.1 – 14.4	28.2 – 28.8	42.3 – 43.2	56.4 – 57.6
Float Charge	13.5	27	40.5	54

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

## CHARGING TEMPERATURE COMPENSATION


.028 VPC for every 10°F (5.55°C) above or below 77°F (25°C) (add .028 VPC for every 10°F (5.55°C) below 77°F and subtract .028 VPC for every 10°C above 77°F).

## OPERATIONAL DATA


Operating Temperature	Self Discharge
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Less than 3% per month depending on storage temperature conditions.

Batteries may be utilized at higher temperatures with the understanding that battery life will be reduced by 50% for every 10° C (18° F) increase in operating temperatures over 68° F (20° C).


## TERMINAL CONFIGURATIONS

8	AP	Automotive Terminal
		<b>Terminal Height Inches (mm)</b> .83 (21) <b>Torque Values in-lb (Nm)</b> 50 – 70 (6 – 8)


BATTERY DIMENSIONS (shown with AP)

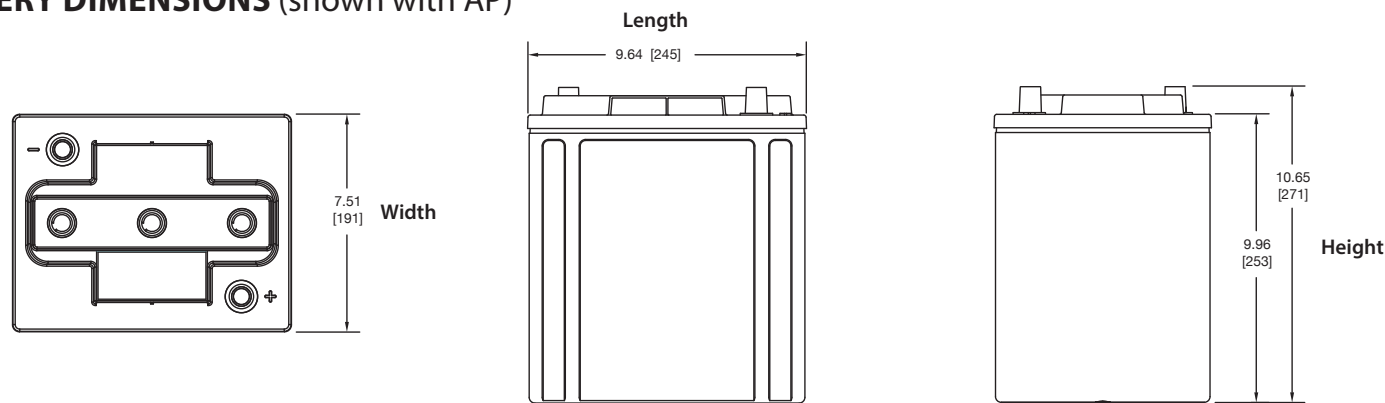

TROJAN TE35-GEL PERFORMANCE

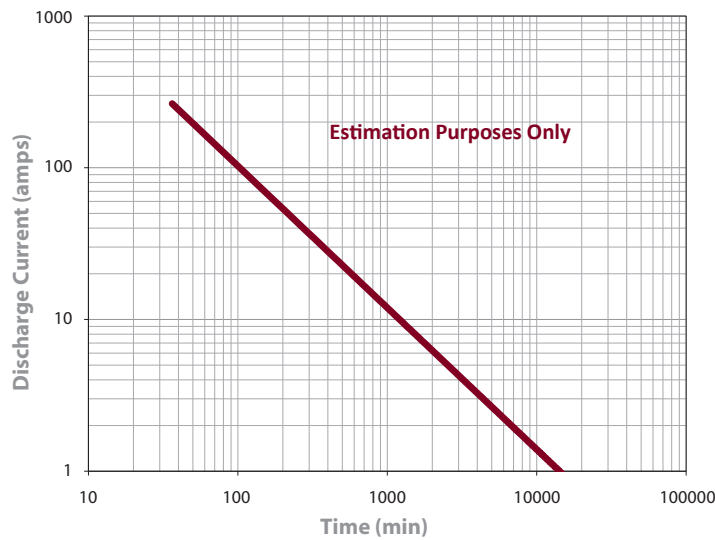

PERCENT CAPACITY VS. TEMPERATURE

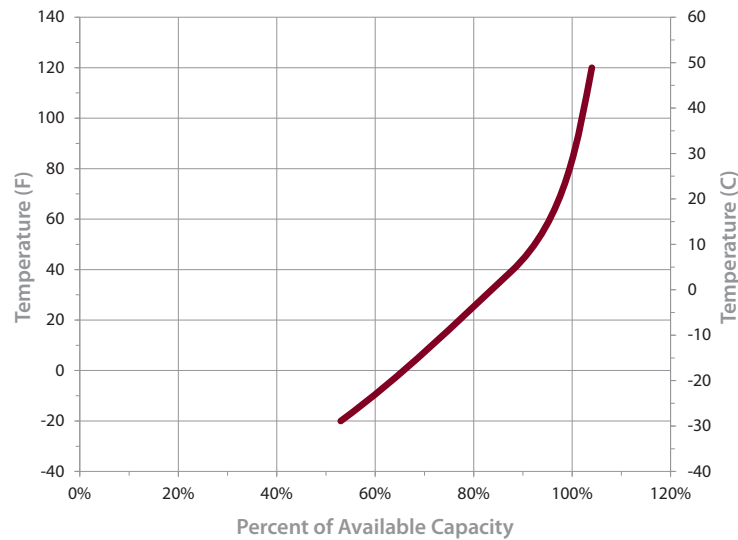

TROJAN BATTERY  
COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001:2008 =



sbs@sbsbattery.com  
www.sbsbattery.com

**SBS Corporate Office**  
N56 W16665 Ridgewood Drive  
Menomonee Falls, WI 53051  
(262) 703-5800  
(800) 554-2243

**SBS Branch Offices**  
Greenville, WI 54942  
(920) 757-1175  
Carol Stream, IL 60188  
(630) 221-1700