

STT Series-Tubular Flooded Batteries

STT2V150 (2V165AH)

Specifications	
Nominal Voltage	2V
Nominal Capacity @ 77°F (25°C)	165 AH (8 hr. to 1.75 V/cell) 235 AH (48 hr. to 1.80 V/cell) 263 AH (120 hr. to 1.85 V/cell) 274 AH (240 hr. to 1.85 V/cell)
Length	4.06 inches (103mm)
Width	8.11 inches (206mm)
Height (with vent cap)	16.1 inches (409mm)
Weight	Without Electrolyte 23.1 lb. (10.5kg) With Electrolyte 34.2 lb. (15.5kg)
Electrolyte / Cell	11.1 lb. (5.0kg) 1.1 gallons
Container & Cover Material	Styrene-acrylonitrile (SAN), Impact Resistant
Positive Plate Construction	Lead-Selenium / Low Antimony Tubular
Negative Plate Construction	Pasted Flat Radial
Post Design	Leak-Proof with Brass Insert
Hardware / Torque Rating	M10 / 180 in. lb.
Preferred Operating Temp.	68° to 77°F (20° to 25°C)
Operating Temp. Range	-4° to 130°F (-15° to 55°C)
Internal Resistance	Approx. 1.15mΩ
Short Circuit Current	1860 Amps
Float Voltage	2.23V at 77°F (25°C)
Equalize Voltage	2.33 to 2.40V at 77°F (25°C)
Max. Charge Current Allowed	45 Amps
Self Discharge	The STT Series batteries may be stored for up to 6 months at 77°F (25°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.






Applications

- Utility
- Telecommunications
- Solar/Photovoltaic
- Oil and gas
- Railways

STT2V150 (2V165AH)

Constant Current Discharge (Amperes) at 77°F (25°C)

F.V/Time	15 min	30 min	1 hr	1.5 hr	2 hr	3 hr	4 hr	5 hr	6 hr	8 hr	10 hr	20 hr	24 hr	48 hr	72 hr	100 hr
1.70V/cell	182	132	86.5	66.9	55.3	42.2	34.7	29.2	25.6	20.4	17.5	9.81	—	—	—	—
1.75V/cell	163	121	81.9	64.0	53.3	40.9	33.8	28.5	25.2	20.6	17.1	9.66	—	—	—	—
1.80V/cell	135	105	74.9	59.3	50.1	38.9	31.7	27.5	24.4	19.5	16.7	9.42	9.06	5.08	3.58	2.67
1.83V/cell	115	91.9	68.0	54.8	47.1	37.0	31.0	26.4	23.5	18.8	16.3	9.19	8.88	4.99	3.51	2.62
1.85V/cell	102	83.4	62.4	51.6	44.8	35.4	29.9	25.6	22.9	18.3	15.8	8.93	8.70	4.90	3.46	2.58

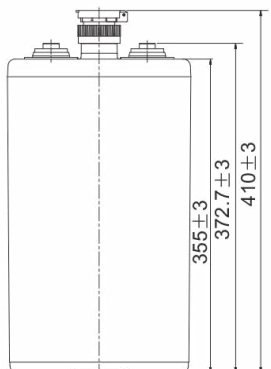

All product specifications and data are subject to change without notice.